

Auto Hand Sanitizing Dispenser

Touchless Dispensing

For public safety a motion sensor to auto dispense hand sanitizer.

Low Liquid Warning Indicator

Low liquid indicator LED will illuminate on the side of the screen for the standalone version,

21" Digital Signage Display Professional 21" Waterproof Display designed for 24/7 operation

Network CMS Upgrade

Cloud based to control content remotely and also be informed when liquid dispenser is running low

HDMI Input

High definition HDMI connector support 1080P content input

Dual Pump

Two pumps which support for either spray or droplits.

IPS Panel

Superior image quality and colour depth and 178° viewing angle and portrait orientation.

Free Wall

Mount

LED Backlight

Improves brightness and contrast as well as improving its life-span and reducing power consumption. Unlike other forms of light this technology is mercury free, making it Environmentally friendly. The panel and backlight have a life-span in excess of 60,000 hours.











s IPS IPS panel Technology

П LED Backlight





sales@tsinteractive.ca www.tsinteractive.ca



T.S. Interactive Solutions Inc. Transforming Your Interactive Experience

Product Advantages

21.5 inch Hand Sanitizing Dispenser support both VESA wall mount and floor standing installation. Auto dispensing functionality, convenience use for anyone in any public space. Help keeping your hands clean and safe for everyone.



Auto dispensing function

Auto Induction sensor



Installation Support both wall mount and floor stand



Plug & Play

Plug and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display.



Temperature Sensor - Optional High sensitive body IR sensor chipset inside, user also can check the body temperature when they approach the display.


CMS

Cloud Based CMS Optional Upgrade to network CMS to control content via the Internet



Touchscreen Optional Fast and accurate touch performance

Product Configurations

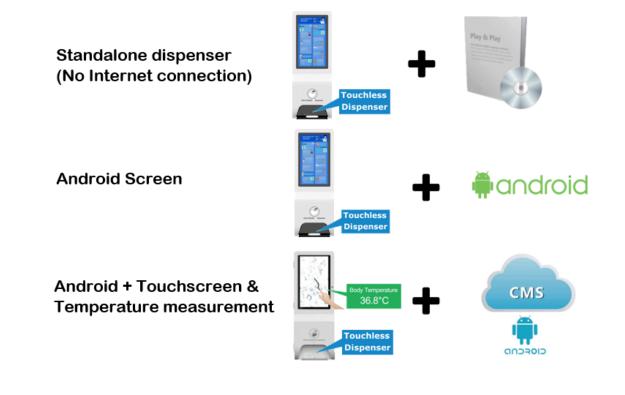



Specifications

Model			Hand Sanitizing Dispenser Display
Panel	Display Size(inch)		21.5"Full HD panel,LED backlight
	Backlit Type		E-LED
	Resolution		1920x1080
	Active Display Area(mm)		474.64 (H)x 268.11 mm(V)
	Aspect Ratio		16:09
	Brightness(cd/m2)		200nit
	Contrast Ratio(Typ.)		1000:1
	Display mode		Nomal black ,IPS
	Display Color		10bit Dithering - 10.07 Billion
	Viewing Angle(H/V)		89/89/89(L/R/U/D)
	Color		16.7M
	Response Time(G-to-G)		бтя
	Operation Hour		24/7
Sound	Audio Output		Built- in speaker 8 Ohm/ 5 watt *2 pcs
	Туре		Internal
Power	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Power Consumption	Max[W/h]	40
		Sleep mode	less than 0.5W
		Off mode	less than 0.5W
Mechanical	Protection Glass		Yes
Spec	Mount Type		Wallmount / Floor standing (optional)
Environmental	Operating Temperature		0°C~45°C
	Storage Temperature		-10°C ~55°C
	Operating Humidity		10~80%
	Storage Humidity		5% ~ 95%
OS	Android Media Player	Processor	Rockchip® RK3368 (1.5ghZ, octa core)
		RAM	2 GB DDR
		Memory	Built-in FLASH memory 8G
		Connections	Ethernet (RJ45), WiFi [Bluetooth, 4G (Optional)]
		LAN	10M/100M Ethernet(Network version screen only)
		Interface	USB2.0*2, RJ-45*1, SD socket*1, HDMI*1,DC*1, Audio*1
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)
		Media Resolution	1920*1080
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)
	Android Version Language		Android 5.1 English (Default) - Multi-language
Sanitizer Dispensing	Dispensing Sanitizer Sanitizer Cpacity		Auto dispense of Sanitizer with hand motion
	Indicator		1000 ml capacity of Sanitizer Content (3L as optional)
Appearance	Color		Light indicator when consume over 75% of sanitizer White Color (standard) - Customized colors based on MOQ
	Surface Treatment		Powder Coated
	Shell Material		Tempered glass & cold rolled sheet
	Installation		Wallmount - Floor Standing Base (optional)
	Screen Position		Vertical
Certification	Safety		CE ROHS
Accessories	Include		Remote Control, Keys, Wallmount bracket, Screws, Power Cable, WiFi Antenna
	Warranty		1 Year
	Type of packaging		PE film + Foam corner protector + Carton or Honeycomb Box
	. , pe or paolaging		

Transforming Your Interactive Experience

